




Technical Data

# CONTURA™ SERIES RECESSED WASTE RECEPTACLE

# B-43644



Patented

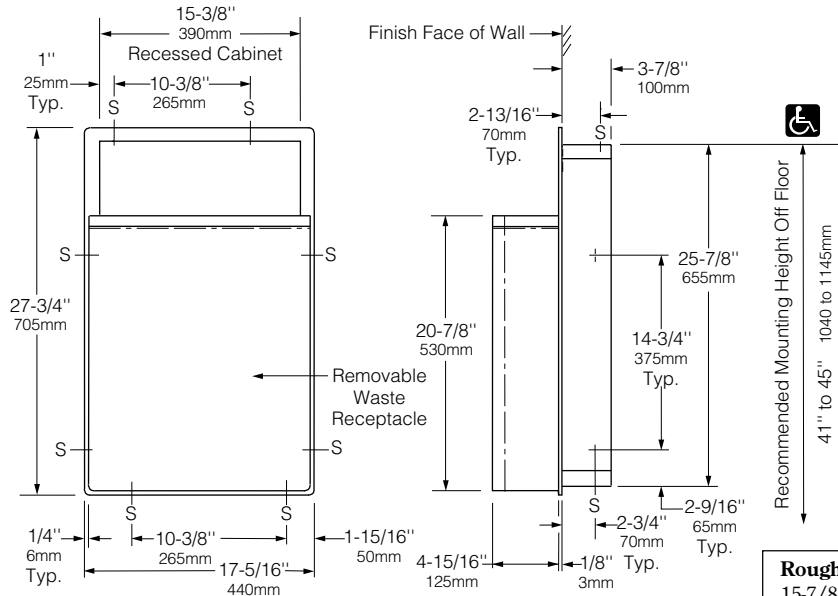

**Rough Wall Opening**  
 15-7/8" (405mm) wide  
 26-1/4" (665mm) high  
 4" (102mm) minimum  
 recessed depth

### MATERIALS:

**Cabinet** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish.

**Flange** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn, one-piece, seamless construction. Radius on corners and return edges complement side edges of waste receptacle.

**Waste Receptacle** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Formed, one-piece, seamless construction. Removable front panel has same degree of arc as other Bobrick Contura Series washroom accessories. Top edge hemmed for safe handling. Radius on side edges of waste receptacle complement other Contura Series accessories. Secured to cabinet with two keyholes over studs on bottom and two tamper-resistant setscrews on top. Equipped with interior clips for securing furnished reusable vinyl liner. Capacity: 12¾ gal. (48.3 L).

### OPERATION:

To empty waste receptacle, remove furnished reusable vinyl liner. Front of waste receptacle is removable for cleaning cabinet interior.

### INSTALLATION:

Provide framed rough wall opening 15-7/8" wide x 26-1/4" high (405 x 665mm). Minimum recessed depth required to finish face of wall is 4" (102mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an *S*, then secure unit with #8 x 1¼" (4.2 x 32mm) screws (not furnished).

### SPECIFICATION:

Recessed waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Front of waste receptacle shall have same degree of arc and match other Bobrick Contura™ Series accessories in the washroom. Radius on corners and edges of flange and waste receptacle shall complement other Bobrick Contura™ Series washroom accessories. Flange shall be drawn, one-piece, seamless construction. Waste receptacle shall have a formed, one-piece, seamless, removable front panel with top edge hemmed and shall be equipped with interior clips for securing furnished reusable vinyl liner. Capacity of waste receptacle shall be 12¾ gal. (48.3 L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

**Recessed Waste Receptacle shall be Model B-43644 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**