

Saniflow push-button operated cast iron cover
Code: SC0085H
General description



- Warm air hair dryer.
- Push-button operated.
- Maximum robustness and vandal-proof.
- Suitable for very high traffic facilities.
- It normally goes along with a soap dispenser

Components and Materials

- Cast iron one-piece cover with white porcelain enamelled coating, 6 mm thick. Cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Saniflow® key wrench.
- Base in aluminium, 3 mm thick, with 4 Ø 8 mm holes for wall mounting.
- Fire resistant plastic UL 94-VO fan scroll.
- Universal motor, 5.500 rpm, B class, included a 2 A fuse with sealed and self-lubricated ball bearings.
- Aluminium centrifugal double symmetrical inlet fan wheel.
- Waved wire NiCr heating element on a mica frame that incorporates a thermal-overload switch at 80 °C.
- Nozzle in chrome plated zamak, 22 µ thick.
- Push -button in chrome plated zamak, 22 µ thick, that activates an electromechanical timer with a 90 seconds cycle.

Technical Specifications

Voltage - 220-240 V	Motor power - 250 W
Frequency - 50/60 Hz	Heating element power - 2000W
Electrical isolation - class I	Consumption - 10A
Dimensions - 255x 282x 244 mm	RPM - 5500
Weight - 11,5 Kg	Air temperature(10 cm distance / 21 °C) - 53°C
Effective airflow - 330 m3/h/ 5500 l/min	Noise level (at 2 m) - 70 dB
Air velocity - 96 Km/h	Installation height - 1300-1500mm
Total power - 2250 W	

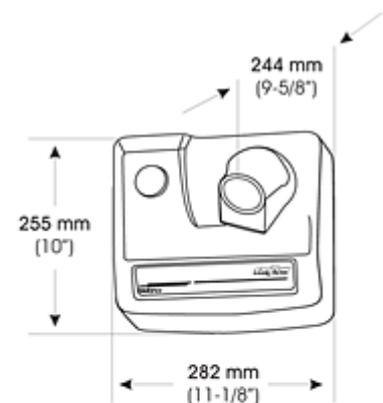

Dim.: ±4%

Operation

Press the button to initiate the drying process. The dryer will go on with no interruption for 90 seconds. Please direct the nozzle to the hair at your own convenience.

Certificates & Qualifications

ISO 9001:2000, CE, AENOR, VDE, GOST. Compliant with electrical safety directives 73/23/CEE & 93/68/CEE and electro-magnetic compatibility directives 89/336/CEE & 92/31/CEE.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

Revision 06-2005
mediclinics S.A

Certified ISO 9001 by

