




Technical Data

# CONTURA™ SERIES RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

# B-43944



Patented

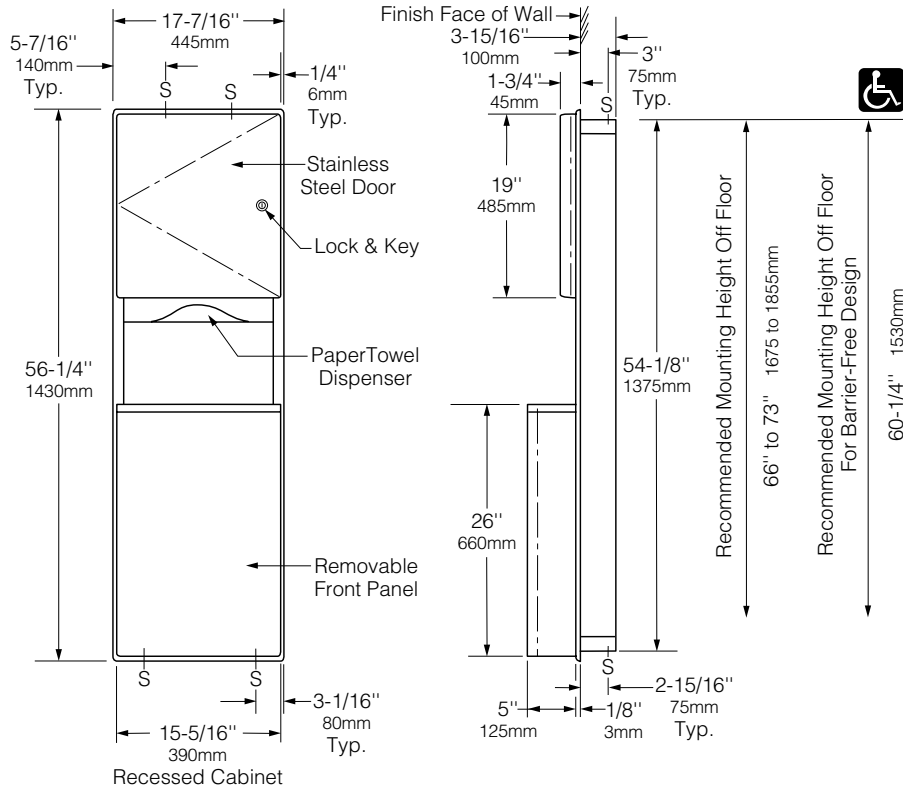

|                                   |
|-----------------------------------|
| <b>Rough Wall Opening</b>         |
| 16" (405mm) wide                  |
| 54-3/4" (1390mm) high             |
| 4" (102mm) minimum recessed depth |

### MATERIALS:

**Cabinet** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish.

**Flange** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn, one-piece, seamless construction. Radius on corners and return edges complement corners and edges of door and waste receptacle.

**Door** — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. Drawn, one-piece, seamless construction. Front of door has same degree of arc as front of waste receptacle and other Bobrick Contura Series washroom accessories. Radius on corners and edges of door match side edges of waste receptacle and other Contura Series accessories. Secured to cabinet with a full-length stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and flush tumbler lock keyed like other Bobrick washroom accessories.

**Paper Towel Dispenser** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Rounded towel tray has hemmed opening to dispense paper towels without tearing. Capacity: 600 C-fold or 800 multifold paper towels.

**Waste Receptacle** — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. Formed, one-piece, seamless construction. Removable front panel has same degree of arc as front of paper towel dispenser door and other Bobrick Contura Series washroom accessories. Top edge hemmed for safe handling. Radius on side edges of waste receptacle match corners and edges of door and other Contura Series accessories. Secured to cabinet with two keyholes over studs on bottom and two tamper-resistant setscrews on top. Equipped with interior clips for securing furnished reusable vinyl liner. Capacity: 16 gal. (60.6 L).

continued . . .

**OPERATION:**

Paper towel dispenser will dispense C-fold or multifold paper towels without adjustment or use of adapters. To empty waste receptacle, remove furnished reusable vinyl liner. Front of waste receptacle is removable for cleaning cabinet interior. Cable door-swing limiter prevents damage to washroom accessories and walls.

**INSTALLATION:**

Provide framed rough wall opening 16" wide x 54-3/4" high (405 x 1390mm). Minimum recessed depth required to finish face of wall is 4" (102mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1 1/4" (4.2 x 32mm) screws (not furnished).

**SPECIFICATION:**

Recessed paper towel dispenser and waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Front of paper towel dispenser door and waste receptacle shall have same degree of arc and match other Bobrick Contura™ Series accessories in the washroom. Radius on corners and edges of flange, door, and waste receptacle shall complement other Bobrick Contura™ Series washroom accessories. Flange shall be drawn, one-piece, seamless construction. Paper towel dispenser door shall be drawn, 18-gauge (1.2mm), one-piece, seamless construction; secured to cabinet with a full-length stainless steel piano-hinge; and equipped with a stainless steel cable door-swing limiter and flush tumbler lock keyed like other Bobrick washroom accessories. Paper towel dispenser shall dispense 600 C-fold or 800 multifold paper towels. Waste receptacle shall have a formed, 18-gauge (1.2mm), one-piece, seamless, removable front panel with top edge hemmed and shall be equipped with interior clips for securing furnished reusable vinyl liner. Capacity of waste receptacle shall be 16 gal. (60.6 L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

**Recessed Paper Towel Dispenser And Waste Receptacle shall be Model B-43944 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**