

SOAP DISPENSERS

SURFACE



DJ0050A White finish

modicinics

Automatic

DJ0050ACS Bright finish

General Description

- Automatic liquid soap or hand sanitizer gel dispenser, with a capacity of 1.2 liters, made of high-impact ABS plastic. Activates automatically
- without the user touching the dispenser to reduce cross-contamination and germ spread.
- Elegant and modern design, allowing the dispenser to seamlessly integrate into any space.
- Ideal for installation in bathrooms, kitchens, offices, schools, banks, hospitals, hotels, and restaurants.
- Equipped with a soap content level indicator, located on the front, allowing constant monitoring of the soap level available inside the dispenser
- Fitted with a security lock that opens with a special key provided, to help prevent tampering, vandalism, and soap theft in public places, while ensuring hygiene.
- Operates with four alkaline batteries 4 AA LR6 (not included).
- Suitable for liquid soap or hand sanitizing gels.
- It is recommended to use liquid soap or gel-type disinfectant soap with the following characteristics: Maximum alcohol content of 80% Density between 0.9 and 1.35 kg/dm3 Viscosity between 500 and 2,500 cps.

No hydroalcoholic soaps/gels containing methanol, chlorine, nor solid particles or abrasives are permitted

 Wall mounting is achieved through four stainless steel screws with a diameter of 4 mm (supplied) along with corresponding plastic wall plugs with a diameter of 6 mm (also supplied).

Components & materials

- CASING: Manufactured with high-impact ABS plastic, 3.0 mm thick (DJ0050A), or manufactured with satin-finished AISI 304 stainless steel (DJ0050ACS), with a level indicator on its front part. It features an opening at the top thanks to a security lock that opens with the special key provided.
- WALL MOUNTING PLATE: Made of 2.8 mm thick ABS plastic. It is mounted on the wall using four M4 stainless steel screws (supplied) with their corresponding Ø 6mm plastic wall plugs (also supplied).
- INNER TANK: Manufactured with 1.5 mm thick plastic.
- ANTI-DRIP VALVE: Corrosion-resistant, dispensing 1.2 ml of soap per service.


Technical specifications

Dimensions	234 x 140 x 102 mm
Maximum capacity	1,2 L
Thickness of the casing	3,0 mm
Thickness of the wall mounting	2,8 mm
Thickness of the soap tank	1,5 mm
Net weight	0,7 Kg
Quantity dispensed per pump	1,2 ml

Dimensions








Dimensions ± 4%

Components and Materials (continued)

- HAND DETECTOR: Infrared with a detection range between 3 and 10 cm.
- POWER SUPPLY: DC power supplied by 4 AA LR6 alkaline batteries (not provided).

MOUNTING

Fix the soap dispenser through the holes of the wall and floor plates, using the stainless steel screws supplied and taking into account the distances of the points indicated by an "S" in the next figure:

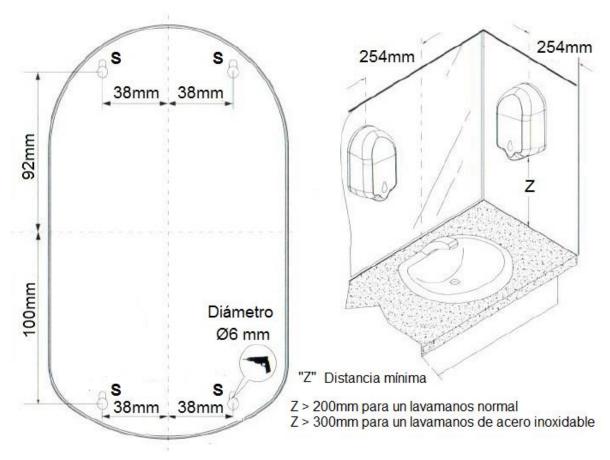

It is recommended to avoid installing the dispenser near highly reflective objects (mirrors, stainless steel sinks, faucets, etc.) to prevent malfunctioning of the presence sensor.

ATTENTION: Do not install this soap dispenser inside the shower, as its electrical components may be seriously damaged by water, causing the dispenser to stop working.

Mediclinics, S.A., se reserva el derecho a efectuar cambios y/o modificaciones en los productos y sus especificaciones sin previo aviso.

© mediclinics S.A.

